



acniti LLC
1-2-9 Nyoidani
Minoh Osaka
562-0011
Japan



turbiti wall mount

The wall mounted Turbiti is the multipurpose nanobubble generator suitable for agriculture, horticulture and fish cultivation sites. Super saturation of oxygen for water day storage tanks in horticulture. Drinking water solutions for chicken, cows, pigs and horses, giving high DO water with ultrafine bubbles to animals with enhance their food digestion more efficiently and results in healthier animals.

turbiti wall mount

turbiti wall mounted nanobubble mixer with enhanced aeration technology

Deprecated: mb_convert_encoding(): Handling HTML entities via mbstring is deprecated; use htmlspecialchars, htmlentities, or mb_encode_numericentity/mb_decode_numericentity instead in **/var/www/cpw/site/modules/ProductPdf/ProductPdf.module.php** on line **762**

- ✓ Clean Tech – Chemical free cleaning solutions
- ✓ easy to implement in existing installations
- ✓ efficient gas dissolution and ultrafine bubble production
- ✓ uses turbiti nanobubble production technology
- ✓ systems in use for poultry and livestock drinking water
- ✓ nanobubble production for irrigation ponds for agriculture
- ✓ combined in wastewater treatment systems
- ✓ special chemical and hydrochloric acid resistant version available


The Turbiti O2 is the multipurpose ultrafine bubble generator suitable for agriculture, horticulture and fish cultivation sites. The Turbiti O2 must be combined with an oxygen generator, which creates 90% pure oxygen out of air.

Inside the turbiti O2 is Acniti's low pressure static mixer swirl flow technology, which creates billions of nano-sized bubbles by beating up the gas water mixture. The Turbiti O2 is flexible to implement, as it can be used with a wide array of pumps.

The turbiti O2 is used for aerating fishponds with nanobubbles. Super saturation of oxygen for water day storage tanks in horticulture. Drinking water solutions for chicken, cows, pigs and horses, giving high DO water with ultrafine bubbles to animals with enhance their food digestion more efficiently and results in healthier animals.

installation overview dual tank setup

1. turbiti O2 nano bubble generator
2. oxiti oxygen concentrator
3. tank 1
4. tank 2
5. pump
6. valve water supply tank 1
7. valve nano bubble water tank 1
8. valve water supply tank 2
9. valve nano bubble water tank 2

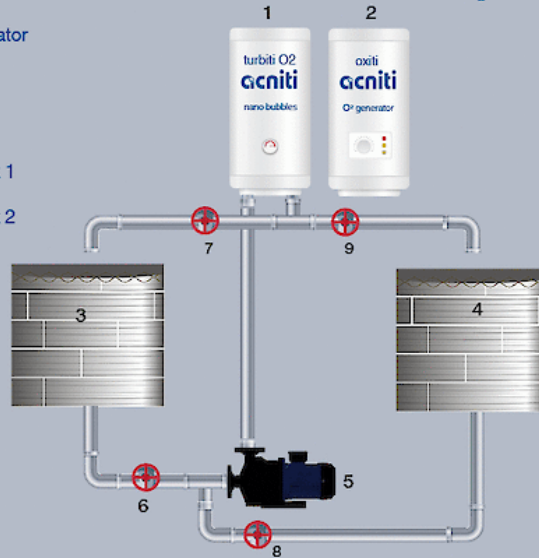

turbiti 727 o2 nanobubble mixer in wall mounted enclosure specs

	Description	Metric	Imperial
1	Model name	Turbiti 727 O2 in wall mounted enclosure	Turbiti 727 O2 in wall mounted enclosure

2	Model number	turbiti_727_wallmount_galvanized-box	turbiti_727_wallmount_galvanized-box
---	--------------	--------------------------------------	--------------------------------------

	Liquid	Metric	Imperial
--	--------	--------	----------

3	Minimum flow / minute	75 Liter	20 Gallon
---	-----------------------	----------	-----------

4	Maximum flow / minute	150 Liter	40 Gallon
---	-----------------------	-----------	-----------

5	Minimum flow / hour	4.5 M3	158.9 CF
---	---------------------	--------	----------

6	Maximum flow / hour	9.0 M3	317.8 CF
---	---------------------	--------	----------

7	water temperature minimum	-20 °C	-4 °F
---	---------------------------	--------	-------

8	water temperature maximum	50 °C	122 °F
---	---------------------------	-------	--------

9	Strainer availability and size	No strainer on the equipment, strainer required when particles larger than 1 or 2 mm.	No strainer on the equipment, strainer required when particles larger than 1 or 2 mm.
---	--------------------------------	---	---

10	Recommended inlet filter(s)	Medium pump inlet filter series	Medium pump inlet filter series
----	-----------------------------	---------------------------------	---------------------------------

	Ambient	Metric	Imperial
--	---------	--------	----------

11	Ambient temperature minimum	-20 °C	-4 °F
----	-----------------------------	--------	-------

12	Ambient temperature maximum	50 °C	122 °F
----	-----------------------------	-------	--------

13	Relative humidity minimum	0 %	0 %
----	---------------------------	-----	-----

14	Relative humidity maximum	100 %	100 %
----	---------------------------	-------	-------

Gas		Metric	Imperial
15	Minimum flow / minute	2.5 Liter	0.7 Gallon
16	Maximum flow / minute	5.0 Liter	1.3 Gallon
17	Minimum flow / hour	150 Liter	40 Gallon
18	Maximum flow / hour	300 Liter	79 Gallon
19	Pressure minimum	50 kPa	7 PSI
20	Pressure maximum	350 kPa	51 PSI
21	Gas quality	No corrosive gasses: suitable for O2, air, CO2, N2	No corrosive gasses: suitable for O2, air, CO2, N2
22	Gas remark	The mentioned pressures are recommended pressures for bubble generation. The product itself can withstand pressures up to 500 kPa.	The mentioned pressures are recommended pressures for bubble generation. The product itself can withstand pressures up to 500 kPa.
Electrical		Metric	Imperial
23	Unit phase Ø voltage		
24	Unit power consumption	No pump included with this product. Estimated power consumption 750-1000 watts.	No pump included with this product. Estimated power consumption 750-1000 watts.
25	Wetted parts	nylon based resins, PVC, EPDM rubber	nylon based resins, PVC, EPDM rubber
26	Pump model	Recommended: use of a low head centrifugal pump or pool pump	Recommended: use of a low head centrifugal pump or pool pump
27	Pump phase Ø voltage		
28	Pump phase Ø voltage 60Hz		
29	Pump pressure setting	This product works well with most low head pumps. Head 10 to 15 meters. (Ask us for more details).	This product works well with most low head pumps. Head 10 to 15 meters. (Ask us for more details).

Electrical		Metric	Imperial
30	Control	Manual by pressure gauche	Manual by pressure gauche
Pump			
31	@option	Ebara-Matrix-5-3	
Connections		Metric	Imperial
32	Water inlet	Rigid Rc 1" female coupling with thread	Rigid Rc 1" female coupling with thread
33	Water outlet	rigid Rc 3/4" female coupling with thread	rigid Rc 3/4" female coupling with thread
34	Gas inlet	10 mm standard quick fitting, 3/8 on request	10 mm standard quick fitting, 3/8 on request
Dimensions & weight		Metric	Imperial
35	Dim. (w) x (d) x (h)	644 x 200 x 1040 mm	25.4 x 7.9 x 40.9 inch
36	weight	26.5 Kg	58.4 lbs.
37	Shipping dim. (w)x(d)x(h)	67 x 37 x 107 cm	26 x 15 x 42 inch
38	Shipping weight	35 Kg	77 lbs.
Remarks			
39	Other remarks	<ul style="list-style-type: none"> ✓ Single unit suitable for pool sizes up to 100.000 liter or 26.500 Gallon ✓ Easy to integrate with existing pool pumps 	

turbiti 737 o2 nanobubble mixer in wall mounted enclosure specs

	Description	Metric	Imperial
1	Model name	Turbiti 737 O2 in wall mounted enclosure	Turbiti 737 O2 in wall mounted enclosure
2	Model number	turbiti_737_wallmount_galvanized-box	turbiti_737_wallmount_galvanized-box
	Liquid	Metric	Imperial
3	Minimum flow / minute	150 Liter	40 Gallon
4	Maximum flow / minute	400 Liter	106 Gallon
5	Minimum flow / hour	9.0 M3	317.8 CF
6	Maximum flow / hour	24 M3	848 CF
7	water temperature minimum	-20 °C	-4 °F
8	water temperature maximum	50 °C	122 °F
9	Strainer availability and size	No strainer on the equipment, strainer required when particles larger than 1 or 2 mm.	No strainer on the equipment, strainer required when particles larger than 1 or 2 mm.
10	Recommended inlet filter(s)	Medium pump inlet filter series	Medium pump inlet filter series
	Ambient	Metric	Imperial
11	Ambient temperature minimum	-20 °C	-4 °F
12	Ambient temperature maximum	50 °C	122 °F
13	Relative humidity minimum	0 %	0 %
14	Relative humidity maximum	100 %	100 %

Gas		Metric	Imperial
15	Minimum flow / minute	5.0 Liter	1.3 Gallon
16	Maximum flow / minute	8.0 Liter	2.1 Gallon
17	Minimum flow / hour	300 Liter	79 Gallon
18	Maximum flow / hour	480 Liter	127 Gallon
19	Pressure minimum	50 kPa	7 PSI
20	Pressure maximum	300 kPa	44 PSI
21	Gas quality	No corrosive gasses: suitable for O2, air, CO2, N2	No corrosive gasses: suitable for O2, air, CO2, N2
22	Gas remark	The mentioned pressures are recommended pressures for bubble generation. The product itself can withstand pressures up to 500 kPa.	The mentioned pressures are recommended pressures for bubble generation. The product itself can withstand pressures up to 500 kPa.
Electrical		Metric	Imperial
23	Unit phase Ø voltage		
24	Unit power consumption	No pump included with this product. Estimated power consumption 750-1000 watts.	No pump included with this product. Estimated power consumption 750-1000 watts.
25	Wetted parts	nylon based resins, PVC, EPDM rubber	nylon based resins, PVC, EPDM rubber
26	Pump model	Recommended: use of a low head centrifugal pump or pool pump	Recommended: use of a low head centrifugal pump or pool pump
27	Pump phase Ø voltage		
28	Pump phase Ø voltage 60Hz		
29	Pump pressure setting	This product works well with most low head pumps. Head 10 to 15 meters. (Ask us for more details).	This product works well with most low head pumps. Head 10 to 15 meters. (Ask us for more details).

Electrical		Metric	Imperial
30	Control	Manual by pressure gauche	Manual by pressure gauche
Pump			
31	@option	Grundfos CM10-1	
32	@option	Ebara pump DWO-400	
Connections		Metric	Imperial
33	Water inlet	Rigid Rc 2" female coupling with thread	Rigid Rc 2" female coupling with thread
34	Water outlet	rigid Rc 1" female coupling with thread	rigid Rc 1" female coupling with thread
35	Gas inlet	10 mm standard quick fitting, 3/8 on request	10 mm standard quick fitting, 3/8 on request
Dimensions & weight		Metric	Imperial
36	Dim. (w) x (d) x (h)	644 x 200 x 1040 mm	25.4 x 7.9 x 40.9 inch
37	weight	26.5 Kg	58.4 lbs.
38	Shipping dim. (w)x(d)x(h)	67 x 37 x 107 cm	26 x 15 x 42 inch
39	Shipping weight	35 Kg	77 lbs.
Remarks			
40	Other remarks	<ul style="list-style-type: none"> ✓ Single unit suitable for pool sizes up to 300.000 liter or 80.000 Gallon ✓ Easy to integrate with existing pool pumps 	

turbiti 747 o2 nanobubble mixer in wall mounted enclosure specs

	Description	Metric	Imperial
1	Model name	Turbiti 747 O2 in wall mounted enclosure	Turbiti 747 O2 in wall mounted enclosure
2	Model number	turbiti_747_wallmount_galvanized-box	turbiti_747_wallmount_galvanized-box
	Liquid	Metric	Imperial
3	Minimum flow / minute	400 Liter	106 Gallon
4	Maximum flow / minute	600 Liter	159 Gallon
5	Minimum flow / hour	24 M3	848 CF
6	Maximum flow / hour	36 M3	1,271 CF
7	water temperature minimum	-20 °C	-4 °F
8	water temperature maximum	50 °C	122 °F
9	Strainer availability and size	No strainer on the equipment, strainer required when particles larger than 1 or 2 mm.	No strainer on the equipment, strainer required when particles larger than 1 or 2 mm.
10	Recommended inlet filter(s)	Medium pump inlet filter series	Medium pump inlet filter series
	Ambient	Metric	Imperial
11	Ambient temperature minimum	-20 °C	-4 °F
12	Ambient temperature maximum	50 °C	122 °F
13	Relative humidity minimum	0 %	0 %
14	Relative humidity maximum	100 %	100 %

Gas		Metric	Imperial
15	Minimum flow / minute	5.0 Liter	1.3 Gallon
16	Maximum flow / minute	8.0 Liter	2.1 Gallon
17	Minimum flow / hour	300 Liter	79 Gallon
18	Maximum flow / hour	480 Liter	127 Gallon
19	Pressure minimum	50 kPa	7 PSI
20	Pressure maximum	300 kPa	44 PSI
21	Gas quality	No corrosive gasses: suitable for O2, air, CO2, N2	No corrosive gasses: suitable for O2, air, CO2, N2
22	Gas remark	The mentioned pressures are recommended pressures for bubble generation. The product itself can withstand pressures up to 500 kPa.	The mentioned pressures are recommended pressures for bubble generation. The product itself can withstand pressures up to 500 kPa.
Electrical		Metric	Imperial
23	Unit phase Ø voltage		
24	Unit power consumption	No pump included with this product. Estimated power consumption 1500-2000 watts.	No pump included with this product. Estimated power consumption 1500-2000 watts.
25	Wetted parts	nylon based resins, PVC, EPDM rubber	nylon based resins, PVC, EPDM rubber
26	Pump model	Recommended: use of a low head centrifugal pump or pool pump	Recommended: use of a low head centrifugal pump or pool pump
27	Pump phase Ø voltage		
28	Pump phase Ø voltage 60Hz		
29	Pump pressure setting	This product works well with most low head pumps. Head 10 to 15 meters. (Ask us for more details).	This product works well with most low head pumps. Head 10 to 15 meters. (Ask us for more details).

Electrical		Metric	Imperial
30	Control	Manual by pressure gauche	Manual by pressure gauche
Connections		Metric	Imperial
31	Water inlet	Rigid Rc 2" female coupling with thread	Rigid Rc 2" female coupling with thread
32	Water outlet	rigid Rc 1.5" female coupling with thread	rigid Rc 1.5" female coupling with thread
33	Gas inlet	10 mm standard quick fitting, 3/8 on request	10 mm standard quick fitting, 3/8 on request
Dimensions & weight		Metric	Imperial
34	Dim. (w) x (d) x (h)	644 x 200 x 1040 mm	25.4 x 7.9 x 40.9 inch
35	weight	26.5 Kg	58.4 lbs.
36	Shipping dim. (w)x(d)x(h)	67 x 37 x 107 cm	26 x 15 x 42 inch
37	Shipping weight	35 Kg	77 lbs.
Remarks			
38	Other remarks	<ul style="list-style-type: none"> ✓ Single unit suitable for pool sizes up to 500.000 liter or 132.000 Gallon ✓ Easy to integrate with existing pool pumps 	